



Making your home Green & Smart

ODU Motherboard Compatibility Setup Guide



WARNING

Disconnect all power to unit before installing or servicing. More than one disconnecting switch may be required to de-energize the equipment. Hazardous voltage can cause server personal injury or death.

ALL phases of this installation must comply with NATIONAL, STATE AND LOCAL CODES

DESCRIPTION

The table provides compatibility explanations for different motherboard components and the corresponding product series they are compatible with.

	Parts Name / Model	Ecoer code	Product Series		
			Ecoer Decades	Ecoer Decades Extreme	Ecoer TDi Pro
ODU	Motherboard component(2436) / EODA18H-2436	EAC230904156	✓		
	Motherboard component(4860) / EODA18H-4860	EAC230904157	✓		
	Motherboard component(2436) / EODA18H-2436BAA	EAC230904158		✓	
	Motherboard component(4860) / EODA18H-4860BAA	EAC33301000005		✓	
	Motherboard component(2436) / EODA19H-2436AAA	EAC230904165	✓ ¹	✓ ²	✓ ³
	Motherboard component(4860) / EODA19H-4860AAA	EAC230904166	✓ ¹	✓ ²	✓ ³

NOTES:

"✓¹": Set n18=1 for compatibility with the Ecoer Decades series (EODA18H-2436, EODA18H-4860).


"✓²": Set n18=2 for compatibility with the Ecoer Decades Extreme series (EODA18H-2436BAA, EODA18H-4860BAA).

"✓³": Set n18=3 for compatibility with the Ecoer TDi Pro series (EODA19H-2436AAA, EODA19H-4860AAA)

When using a compatible motherboard (EAC230904165/EAC230904166) to replace the previous motherboard, please follow the steps below for setup:

Step 1: Power off the outdoor unit and disconnect the power source. Wait for at least 30 seconds to ensure the discharge of any residual electricity on the motherboard before proceeding with the following operations.

Step 2: Remove the cables and screws from the original motherboard and remove the original motherboard. (Make sure to keep the 6 installation screws that were removed for future use)

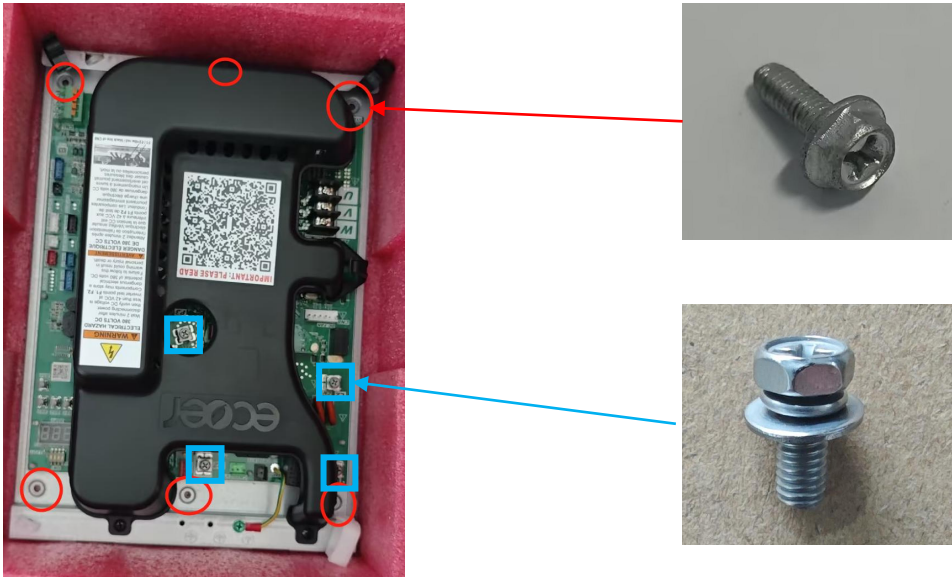

Step 3: Reconnect the cables and fix the motherboard. Make sure the wiring is correct. Note that the screws in the red and blue frames are different, do not mix the screws.

Step 4: Please proceed with the appropriate settings based on the installed series or model:

Product Series	Model	HPS	Dip Switch	Image
Ecoer Decades	EODA18H-2436, EODA18H-4860	×	ON	Figure 1
Ecoer Decades Extreme	EODA18H-2436BAA, EODA18H-4860BAA	×	ON	Figure 1
Ecoer TDi Pro	EODA19H-2436AAA, EODA19H-4860AAA	√	1	Figure 2

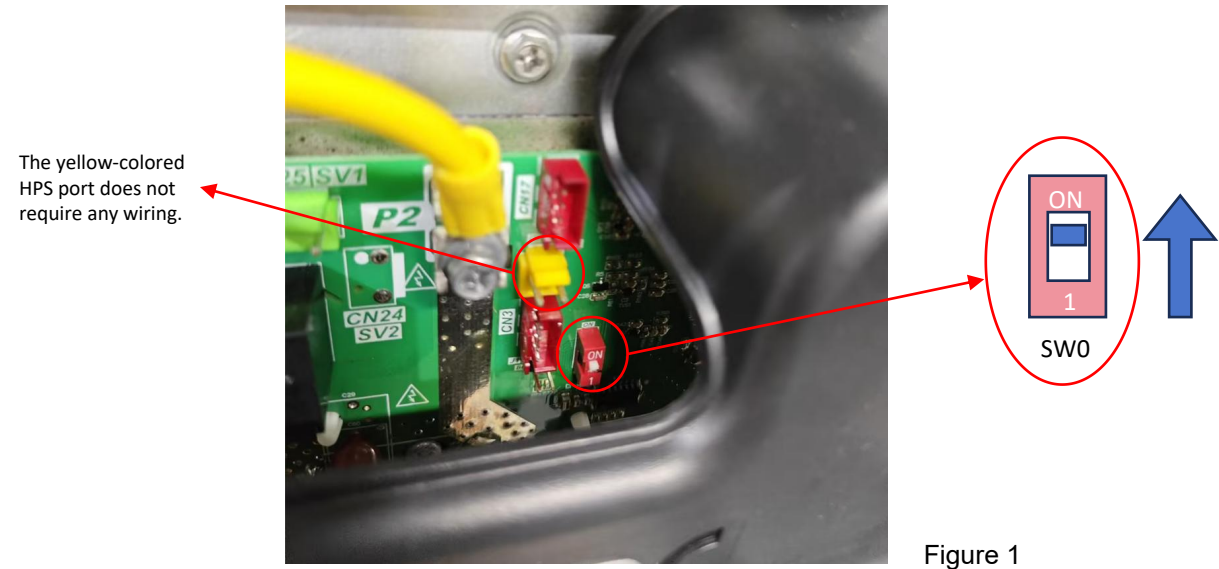


Figure 1

The yellow-colored HPS port is connected to the corresponding cable.


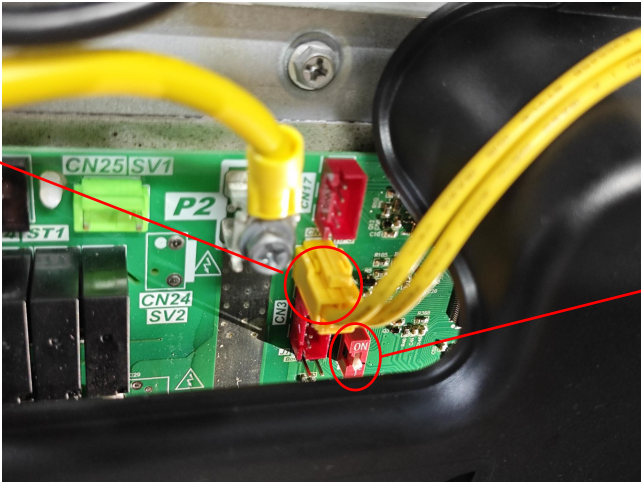


Figure 2

Step 5: Power on the outdoor unit and keep it in standby mode (do not send any startup commands). Ensure proper wiring of the motherboard before system power-up.

Step 6: Please follow the steps shown in the diagram and perform the appropriate settings based on the installed series or model:

Product Series	Model	Set N18
Ecoer Decades	EODA18H-2436, EODA18H-4860	1
Ecoer Decades Extreme	EODA18H-2436BAA, EODA18H-4860BAA	2
Ecoer TDi Pro	EODA19H-2436AAA, EODA19H-4860AAA	3

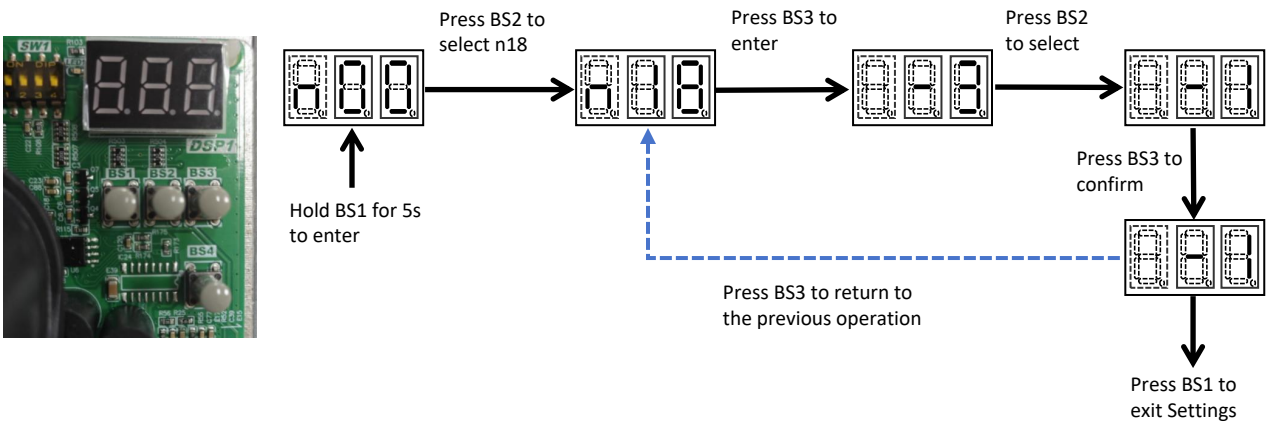

Step 7: After completing the above setup, please perform a normal operational check on the device to ensure it is running properly.

©2024 ECOER INC.

43671 Trade Center Place, Suite 100
Dulles, VA 20166 USA

Tel: 703-348-2538

www.ecoer.com

