



SUBMITTAL DATA SHEET

Duct Heat Pump System

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

Set Code
Indoor unit code 22023010005843
Outdoor unit code 22023011003416
22022516001922

Set Model
Indoor unit model MIU-A48LD-2
Outdoor unit model MOU-A48LH-2

Certified



SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	42.0
Max.fuse(Outdoor)	(A)	50.0
Connection wiring		14AWG*2 Stranded, shielded
Cooling		
Capacity	(Btu/h)	48000(10300~53100)
Power Input	(W)	5840(1070~6020)
Current	(A)	26(6.58~26.29)
SEER2	(Btu/W)	14.3
EER2	(Btu/W)	8.2
Heating		
Capacity	(Btu/h)	52000(11500~63600)
Power Input	(W)	4650(690~5570)
Current	(A)	20.5(4.78~24.3)
HSPF2-4	(Btu/W)	10.3
HSPF2-5	(Btu/W)	8.4
COP	W/W	3.28
Heat at 17F(H32)	(Btu/h)	39500
Heat at 5F(H42)	(Btu/h)	46000
COP at 5F(H42)	W/W	2.02

REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV+Throttle valve
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	148.00
Refrigerant precharge	(ft)	25.0
	(m)	7.5
Additional charge for each ft	(oz/ft)	0.32
Additional charge for each m	(g/m)	30.0
Liquid side/ Gas side(indoor)	(inch)	3/8"/5/8"
	(mm)	9.52/15.9
Liquid side/ Gas side(outdoor)	(inch)	3/8"/5/8"
	(mm)	9.52/15.9
Max. pipe length	(ft)	213.3
	(m)	65.0
Max. difference in level	(ft)	98.4
	(m)	30.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	62~90
	(Deg. °C)	17~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30
Outdoor(cooling)	(Deg. °F)	5~122
	(Deg. °C)	-15~50
Outdoor(heating)	(Deg. °F)	-22~75
	(Deg. °C)	-30~24


INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFN-560-8-1-1
Qty		1
Input	(W)	560.00
Output	(W)	560.0
RLA	(A)	2.5
Speed(Hi/Mi/Lo)	(r/min)	940/820/740
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	529.41/1529.41/1117.65/735.29
Indoor noise level (Hi/Med/Lo)	[dB(A)]	54.5/50.5/47.5
Dehumidification	(L/H)	4.87
Indoor unit		
Dimension (WxDxH)	(inch)	47.24x34.41x11.81
	(mm)	1200x874x300
Packing(WxDxH)	(inch)	55.31x36.02x14.37
	(mm)	1405x915x365
Net/Gross weight	(lbs.)	119.71/141.76
	(kg)	54.3/64.3

OUTDOOR UNIT DATA

Compressor		
Type		ROTARY
Model		EAPQ420D1UMUA
Brand		GMCC
Capacity	(Btu/h)	44015
Input	(W)	3565
Rated current (RLA)	(A)	33
Refrigerant oil/oil charge	(ml)	1460±15ml/ESTER OIL VG74
Outdoor fan motor		
Model		ZKFN-85-8-22-5
Qty		2
Input	(W)	126.0
Output	(W)	85
RLA	(A)	1.2
Speed	(r/min)	900/850/800/750
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	4500
Outdoor noise level	[dB(A)]	65.0
Outdoor unit		
Dimension (W×D×H)	(inch)	37.48x16.34x52.48
	(mm)	952x415x1333
Packing (W×D×H)	(inch)	43.11x19.49x58.27
	(mm)	1095x495x1480
Net/ Gross weight	(lbs.)	227.07/255.73
	(kg)	103/116

Indoor unit dimension(internal pump)

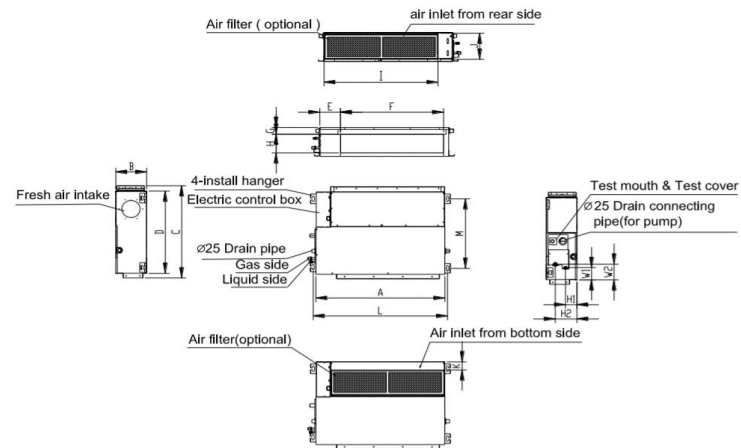

Model (KBTu/h)	unit	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
9/12	mm	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84
	inch	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3
18	mm	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112
	inch	34.6	8.3	26.5	23.6	5.5	27.8	2.0	5.4	30.8	7.5	1.6	36.2	20.0	3.1	5.8	3.5	4.4
24	mm	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155
	inch	43.3	9.8	30.5	27.6	5.5	36.5	2.0	6.9	39.4	9.0	0.2	44.9	23.5	3.1	5.9	5.1	6.1
36	mm	1360	249	774	700	140	1186	50	175	1261	228	5	1400	598	80	150	130	155
	inch	53.5	9.8	30.5	27.6	5.5	46.7	2.0	6.9	49.6	9.0	0.2	55.1	23.5	3.1	5.9	5.1	6.1
48	mm	1200	300	874	800	123	1044	50	227	1101	280	5	1240	697	80	150	185	210
	inch	47.2	11.8	34.4	31.5	4.8	41.1	2.0	8.9	43.3	11.0	0.2	48.8	27.4	3.1	5.9	7.3	8.3

Outdoor unit dimension

