

# High Wall Heat Pump Ductless System

Indoor Model: **DLFEHAH12XAK**


## Submittal Data

Job Data:  Location:

Buyer:  Buyer P.O. #:  Carrier #:

Unit Number:  Model Number:

Performance Data Certified By:  Date:

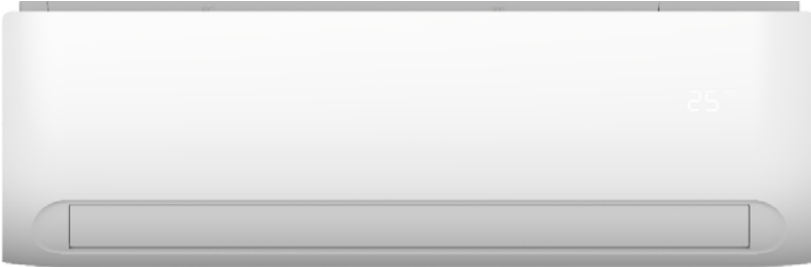

### STANDARD FEATURES

- Up-Down Louver control (fixed or swing)
- Remove filter from the top
- Improved serviceability with easy access to fan and electrical connections
- Four fan speeds
- Sleep Mode
- Follow Me (senses temperature at handheld remote)
- Quiet operation
- Aluminum Golden Hydrophilic pre-coated fins

### Controls:

- Wireless Remote Controller included with indoor unit
- Optional Wired Remote Controller KSACN0401AAA

|                 |  |              |               |
|-----------------|--|--------------|---------------|
| System          | Size   | 12           |               |
|                 | Indoor Model                                   | DLFEHAH12XAK |               |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz      | 208/230-1-60  |
|                 | Power Supply                                   | 0            |               |
|                 | MCA  | A.           | 0.25          |
| Controls        | Wireless Remote Controller (°F/°C Convertible) | Standard     |               |
|                 | Wired Remote Controller (°F/°C Convertible)    | Optional     |               |
| Operating Range | Cooling Indoor DB Min -Max                     | ° F (° C)    | 63~90 (17~32) |
|                 | Heating Indoor DB Min -Max                     | ° F (° C)    | 32~86 (0~30)  |
| Piping          | Pipe Connection Size - Liquid                  | in (mm)      | 1/4 (6.35)    |
|                 | Pipe Connection Size - Suction                 | in (mm)      | 1/2 (12.7)    |

|                            |                                    |              |                |
|----------------------------|------------------------------------|--------------|----------------|
| Indoor Coil                | Face Area (sq. ft.)                | Sq. Ft.      | 1.48           |
|                            | No. Rows                           | 2            |                |
|                            | Fins per inch                      | 20           |                |
|                            | Circuits                           | 2            |                |
| Indoor                     | Unit Width                         | in (mm)      | 32.00 (813)    |
|                            | Unit Height                        | in (mm)      | 11.81 (300)    |
|                            | Unit Depth                         | in (mm)      | 7.75 (197)     |
|                            | Net Weight                         | lbs (kg)     | 22.49(10.2)    |
|                            | Number of Fan Speeds               | 4            |                |
|                            | Airflow (lowest to highest)        | CFM          | 12/282/324/351 |
|                            | Sound Pressure (lowest to highest) | dB(A)        | 34/39/41/43    |
|                            | Air throw Data                     | ft (m)       | 22.6 (6.9)     |
|                            | Moisture removal                   | Pint/h (L/h) | 3.38 (1.6)     |
| Field Drain Pipe Size O.D. | in (mm)                            | 0.625 (16)   |                |

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.  
For Compatibility See Product Data

### Accessories

|              |   |
|--------------|---|
| KSACN0401AAA | Wired Remote Control 7 day Programmable |
| KSAIF0101AAA | Wi-Fi™ Kit High Wall                    |

# Construction View

Indoor Model: DLFEHAH12XAK

