


6/12 Series vs AireShield

Key Features



- 3 or 4 Digital Display
- Internal Buzzer (85 dBA at 10cm)
- Replaceable Sensors (certain models)
- 6 Series: 12-24VAC/12-32VDC input
- 12 Series: 100-240VAC
- Selectable Fan and Alarm Relay Actuation Settings
- Analog Circuit
- Digital w/MRS-485 Adapter (6 series only)

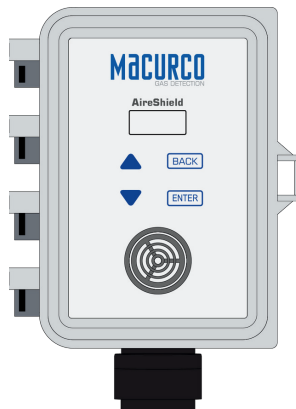

Key Features

- 2x8 Character Display
- **Optional Buzzer (90 dBA at 10ft)**
- **Replaceable Smart Sensors**
- 12-24VAC or 12-32VDC input
- **IP65/NEMA4X Enclosure**
- Built-in Colored LEDs
- Dual Sensor Capability
- Adjustable I/O & Cal-Gas Settings
- **Analog/Digital Communication**
- Downloadable Data
- **Bluetooth App**
- **Remote Sensor**