




TAG:

SUBMITTAL

Up to 3 Ton Inverter Split System Heat Pump

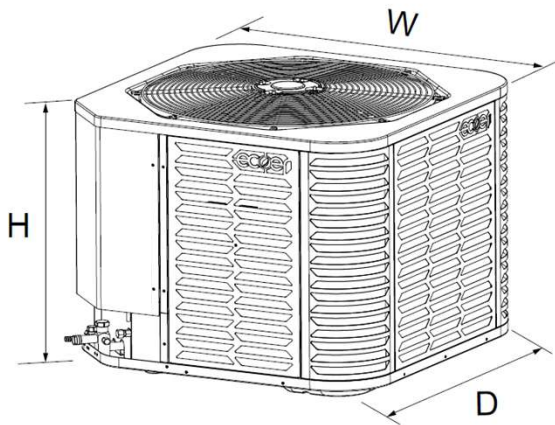

Product Specifications

OUTDOOR UNIT	EODA17H-2436ADA
Voltage-Phase-Hz	208/230-1-60
Minimum Circuit Ampacity	24.4A
Max. Over-current Protection	30A
COMPRESSOR	Variable rotary
RLA	17.5A
LRA	52A
Drive Method	Inverter
Noise-cancelling Jacket	Factory installed
Crankcase Heater	Internal heating
OUTDOOR FAN	Propeller
Condenser Fan Motor Type	Brushless DC Motor
Horse Power (HP)	1/3
FLA	2.5
OUTDOOR COIL TYPE	Copper tube with hydrophilic aluminum fins
Rows	1
Tube Size (in.)	9/32
Heating Metering Device	EEV
Cooling Metering Device (Indoor side)	EEV
Factory Supplied Refrigerant Charge (R-32)	4 lb. 10 oz
Liquid Line Size (in. O.D.)	3/8
Suction Line Size (in. O.D.)	3/4
Dimensions (inch) (W X H X D)	29-1/8 x 24-1/4 x 29-1/8
Net Weight (LBS)	134
Shipping Weight (LBS)	163
Max. Line Length (FT)	150
Max. Elevation Difference (FT)	50

Sound pressure level (dB)

EODA17H-2436ADA	2Ton *	3Ton
Standard	63	65
Silent mode	59	62
Super silent mode	56	59

* Refer to the installation manual for capacity selection.

Mechanical Specifications

Communication Method

Compatible with most 24Vac controlled thermostats and R-454B/ R-32 indoor units.

General

The EODA17H-2436ADA is fully charged up to 25ft line set from the factory. This unit is designed to operate at outdoor ambient temperatures as high as 125°F (and as low as 20°F) in cooling mode, and as low as -5 °F in heating mode. Cooling/Heating capacities are matched with air handler that are AHRI certified. The units are certified to ETL.

Casing

Unit casing is constructed of heavy gauge, Galvanized steel and painted with a weather resistant powder paint on all grilles, panels.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor inverter drive, electronic expansion valve and reversing valve.

Rotary Compressor

Flexible capacity output from 30%-110%.
Compressor is equipped with Noise-cancelling Jacket.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer.
The coil is protected on all four sides by grille panels.

